

TRANSLATION

(1) **Type Examination Certificate**

(2) No. of the Type Examination Certificate: **ZP/B056/23**

(3) Product: **Anchor device type C**
Type: **AIO-ENDS-50/51**

(4) Manufacturer: **INNOTECH® Arbeitsschutz GmbH**

(5) Address: **Laizing 10, 4656 Kirchham, Austria**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 23-070.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2017

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2028-04-16.

DEKRA Testing and Certification GmbH
Bochum, 2023-04-17

signed: Krökel
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B056/23
- (13) 13.1 Subject and Type
Anchor device type C
Type: AIO-ENDS-50/51

13.2 Description

The anchor device of type C, type: AIO-ENDS-50/51 (Fig. 1) is used for the temporary protection of maximum 4 people against falls from a height. The anchor line of the anchor device is made of a wire rope (\varnothing 8 mm in the format 7 x 7).

The anchor device is fastened using the respective end anchors. The wire rope is fastened to the provided clamping devices of these end anchors. The user secures himself against falls from a height by connecting his personal protective equipment to a connector according to EN 362.

It is not possible to override the intermediate structural anchors.

The anchor device of type AIO-ENDS-50/51 is fastened to the structure horizontally, using end anchors and intermediate structural anchors, to surfaces of sufficient strength with the respective anchor devices. It is not possible to override the end anchors. The pre-tensioning of the flexible anchor line is 1.0 kN; here, a maximum distance of 15 m is not to be exceeded.

The metal components of the anchor device are made of corrosion-resistant steel.

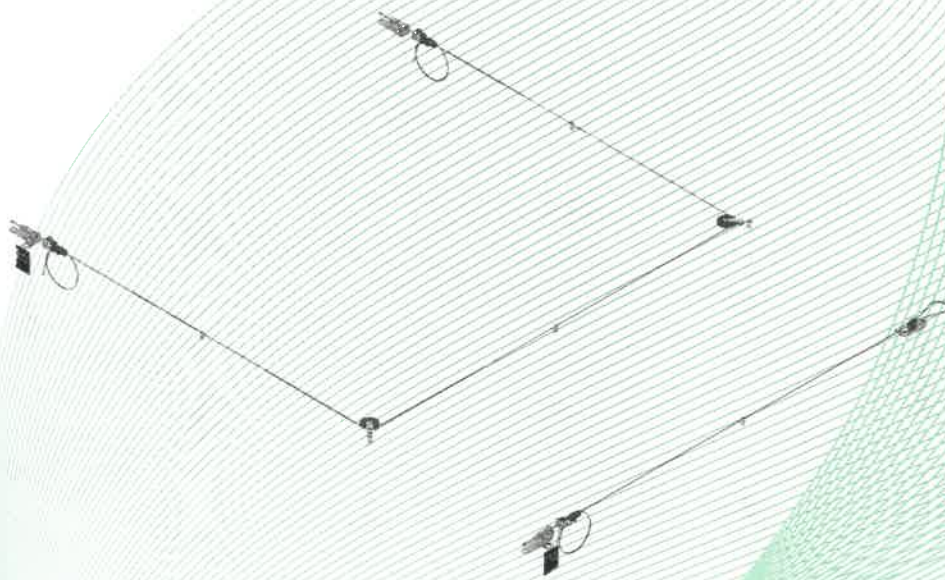


Fig. 1: Application example of the anchor device type AIO-ENDS-50/51

TRANSLATION

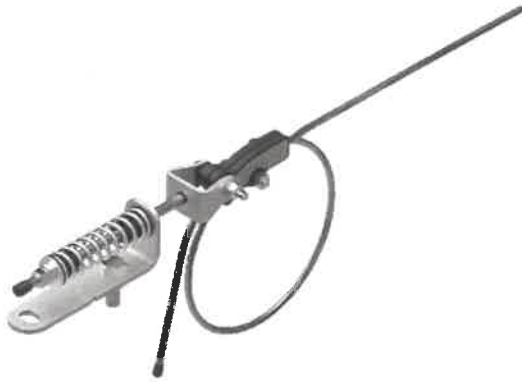


Fig. 2: End anchor of the anchor device with pre-tensioner, type AIO-ENDS-50

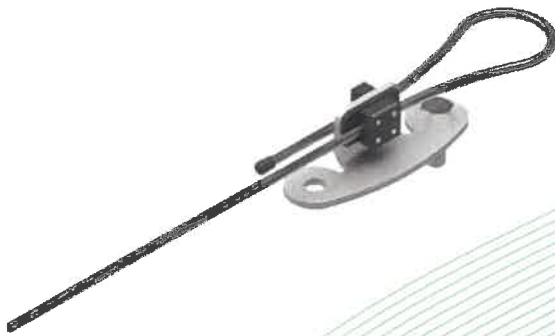


Fig. 3: End anchor of the anchor device type AIO-ENDS-51

(14) Report

PB 23-070 dd. 2023-04-17