

# (1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B112/21**

(3) Product: **Anchor device type A**  
Type: **INDUSTRY-11**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, 4656 Kirchham, Austria**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 21-121.

(8) The requirements of the standard are assured by compliance with

**DIN EN 795:2012**

**DIN CEN/TS 16415:2017**


(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2026-07-05.

DEKRA Testing and Certification GmbH  
Bochum, 2021-07-06

signed: Kilisch  
Managing director

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
Managing director

## TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**  
**ZP/B112/21**
- (13) 13.1 Subject and Type  
Anchor device type A  
Type: INDUSTRY-11

### 13.2 Description

The anchor device of type A, type INDUSTRY-11 (Fig. 1) is used to protect maximum three people against falls from a height. It is intended for being mounted on the standing seams of roof profiles of sufficient strength.

For that purpose, the anchor device is clamped on the standing seams of the roof profile using three edged steel sheet profiles made of corrosion-resistant steel. These profiles are adjusted to the outline of the standing seams of the roof.

A drill hole which receives the user's connector is inserted at the top of the anchor device. The user connects his personal protective equipment against falls from a height to this drill hole.

After being placed on the standing seam of the roof, the profile halves are screw-fastened to each other by means of four bolts with nuts and lock washers.

The anchor device is intended for bearing loads exerted from any direction.

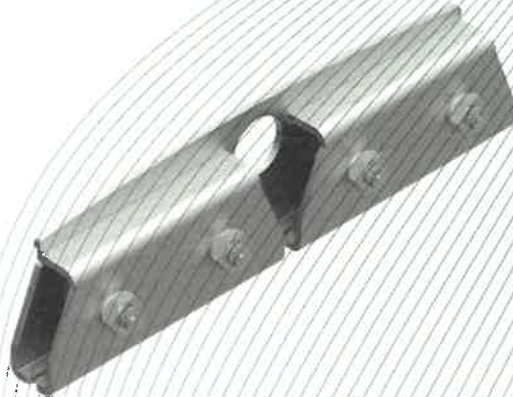


Fig. 1: Anchor device type A, type: INDUSTRY-11

- (14) Report  
PB 21-121, 2021-07-06