


# (1) Type Examination Certificate

- (2) No. of the Type Examination Certificate: **ZP/B114/21** replaces ZP/B066/16
- (3) Product: **Anchor device type A**  
**Type: POINT-11**
- (4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**
- (5) Address: **Laizing 10, 4656 Kirchham, Austria**
- (6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.
- (7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 21-123.
- (8) The requirements of the standard are assured by compliance with  
**DIN EN 795:2012** **DIN CEN/TS 16415:2017**
- (9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.
- (10) This Type Test Certificate is valid until 2026-08-29.

DEKRA Testing and Certification GmbH  
Bochum, 2021-08-30

signed: Kilisch  
Managing director

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
Managing director



## TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**  
**ZP/B114/21**
- (13) 13.1 Subject and Type  
Anchor device type A  
Type: POINT-11

### 13.2 Description

The anchor device of type POINT-11, (Fig. 1) is used as a single anchor point to protect a maximum number of three people against falls from a height.

The anchor device consists of a round bar made of corrosion resistant steel with a diameter of 18 mm. An anchor eyelet is screwed to the upper end of the round bar and secured by two hexagonal M12 nuts. The user can connect his personal protective equipment to this freely rotating anchor eyelet in order to secure himself against falls from a height. The height of the anchor device type POINT-11 is between 300 mm and 600 mm. The anchor device of type POINT-11 is directly fastened to the structure on suitable wooden surfaces of sufficient strength and by using appropriate fasteners. The anchor device can be loaded in any direction to the roof surface.

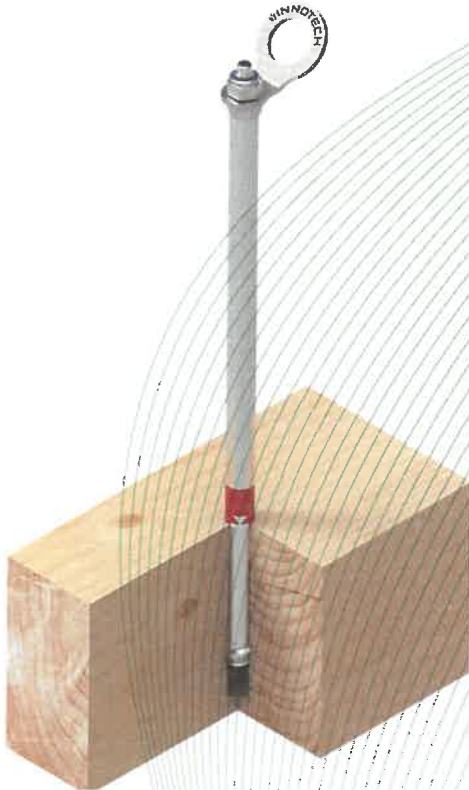


Fig. 1: Anchor device type A, type POINT-11

- (14) Report  
PB 21-123, 2021-08-30