


(1) Type Examination Certificate

- (2) No. of the Type Examination Certificate: **ZP/B011/20**
- (3) Product: **Anchor device type A**
Type: **SDA-35**
- (4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**
- (5) Address: **Laizing 10, 4656 Kirchham, Austria**
- (6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.
- (7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 20-005.
- (8) The requirements of the standard are assured by compliance with
DIN EN 795:2012 **DIN CEN/TS 16415:2017**
- (9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.
- (10) This Type Test Certificate is valid until 2025-01-14.

DEKRA Testing and Certification GmbH
Bochum, 2020-01-15

signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B011/20
- (13) 13.1 Subject and Type
Anchor device type A
Type: SDA-35

13.2 Description

The anchor device, type: SDA-35 (Fig. 1) serves as a single anchor point to protect a maximum of two persons against falls from a height.

The mounting takes place on sufficiently solid ground. The anchor device made of corrosion-resistant steel ($t = 3\text{mm}$) has dimensions of 466 mm x 64 mm. At one end of the steel plate there is a folded anchor point (40 x 64 mm).

The anchor device is fastened to the solid ground using appropriate fastening elements in the holes ($\varnothing 8.5\text{ mm}$) of the base plate. The user can connect his personal protective equipment against falls from a height to the eyelet. The anchor device can be loaded in all directions parallel to the building structure.

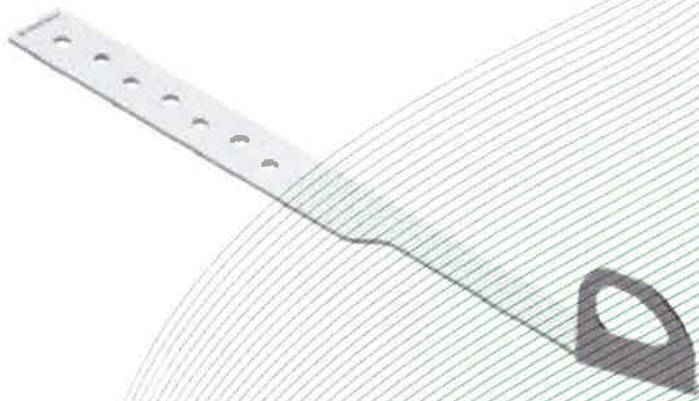


Fig. 1: Anchor device, type: SDA-35

- (14) Report

PB 20-005, 2020-01-15